

DYNAMIQ

INTELLIGENT COATINGS



PRODUCT CATALOGUE | 2022

ABOUT US

DynamiQ Intelligent Coatings is a new-generation, forward thinking enterprise dedicated to developing and supplying unique, solution-specific coatings to the Agricultural, Industrial and Commercial business sectors in SA. Working in partnership with our manufacturers who have been developing and manufacturing paint coatings since 1964, we have set out to research and identify coating challenges within specific industries. To this end we have in-turn already developed a range of top-quality high-end products that are affordable and easy to apply. Together with our manufacturing partner we have access to product development and research, premium quality materials and some of the sharpest minds in the business, as well as a wealth of coating information gathered over 66 years in the paint business. Using the latest formulating technologies available, we have developed a new generation of intelligent coatings that are highly-efficient, environmentally friendly and proudly South African.

DynamiQ Intelligent Coatings – Unique coating solutions for South Africa and beyond.

PRODUCT CATALOGUE

PRIMERS						
CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DBITUMINPR20	Dynamiq Bituminous Primer 20ltr	A water-based, fibre filled clear primer for bitumen to prevent leaking of bitumen through top final coats of paint.	Clear	2hours. Allow 8hrs curing time before final coats	6-8 sqm per litre (1 coat)	Roller, or brush
DUNIVERSAL20	Dynamiq Universal Undercoat 20ltr	A universal undercoat used over previously painted surfaces that are in poor condition. Also used as a cross-over coat from enamel to PVA. Available in white only.	White	12 Hours	8 sqm per litre (1 coat)	Mohair roller or brush
DUNIVERSAL5	Dynamiq Universal Undercoat 5ltr					
DPP20	Dynamiq Solvent Plaster Primer 20ltr	An alkali-resistant white primer for plaster, concrete, bricks and rhinolite. Binds and seals surfaces creating a strong key for finishing coats.	White	8 Hours	6-8 sqm per litre per coat	Mohair roller or brush
DPP5	Dynamiq Solvent Plaster Primer 5ltr					
DBONDING20	Dynamiq Clear Solvent Bonding Liquid 20ltr	A clear binding and sealing agent for soft, powdery plaster. Prevents efflorescence. Ideal for priming gypsum surfaces, damp affected areas, peeling, blistering and chalking paint.	Clear	12 Hours (overnight)	8 sqm per litre coat	Mohair roller or brush
DBONDING5	Dynamiq Clear Solvent Bonding Liquid 5ltr					

PRIMERS (Continued...)

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DBONDKEY20	Dynamiq Key Bond 20ltr	A water based high-strength keying and bonding agent for binding and waterproofing friable surfaces. Can be added to plaster mixes to strengthen and waterproof or to tile cement. Not recommended for gypsum/rhinolite surfaces.	Milky colour, dries clear	6hrs	10 sqm per litre depending on surface porosity	Brush
DBONDKEY5	Dynamiq Key Bond 5ltr					

PAINTS

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DCHIRP20	Dynamiq CHIRP Heat Reflecting Acrylic 20ltr	CHiRP is a new generation elastic, bright white, long-life, water-based, highly reflective roof acrylic designed to reduce interior temperatures. For use on chickenhouse roofs, cement tiles, previously painted roofs, factory and commercial roofs, flat concrete roofs and tiled roofs.	Bright white only	2-3 hours drying time between coats	6-8 sqm per 1 litre per coat	Roller, brush or airless spray
DCHIRP5	Dynamiq CHIRP Heat Reflecting Acrylic 5ltr					
DGENPVA20	Dynamiq GP Int/Ext White Acrylic 20ltr	An SABS approved general purpose matt acrylic. For interior and exterior use. Ideal as a ceiling paint.	White	4 hours between coats	8 sqm per litre (1 coat)	Sheepskin roller or brush
DGENPVA5	Dynamiq GP Int/Ext White Acrylic 5ltr					



PAINTS (Continued...)

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DSS20	Dynamiq Superskin 20ltr	Superskin is a new generation low sheen, waterproof, elastic, long-life, ure acrylic intelligent coating. For use on most surfaces: interior and exterior walls, tiled and galvanised roofs, metal surfaces, parapet walls, concrete slabs and window sills. Not only can DynamiQ Superskin be used for waterproofing, it has also been formulated to be used as a final wall coating ensuring the best of both worlds.	Standard colours - can be tinted	2-3 hours drying time between coats	8sqm per 1 litre per coat (Do not exceed 4 SQM per litre when applying as a 1 coat system)	Roller, brush or airless spray
DSS5	Dynamiq Superskin 5ltr	Dynamiq Superskin is based on the latest emulsion technologies available. DynamiQ Superskin can be applied as a one coat system* over a properly primed surface, making it simple to apply and reducing time and labour costs. * Spreading rate not exceeding 4sqm per litre when applying as a 1 coat system				
DGP20	Dynamiq GP Int/Ext Pastel Base Acrylic 20ltr	An SABS specification general purpose matt acrylic. For interior and exterior use.	Standard colours - can be tinted	4 hours between coats	8 sqm per litre per coat	Sheepskin roller or brush
DGP5	Dynamiq GP Int/Ext Pastel Base Acrylic 5ltr					
DSX20	Dynamiq Silk Int/Ext Sheen Acrylic 20ltr	A premium low sheen acrylic for interior and exterior use. Stain-resistant and washable. Available in standard colours and can be tinted in any colour of your choice.	Standard colours - can be tinted	4 hours between coats	8 sqm per litre per coat	Sheepskin roller or brush
DSX5	Dynamiq Silk Int/Ext Sheen Acrylic 5ltr					

PAINTS (Continued...)

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DWBENAMEL20	Dynamiq Waterbased Enamel Paint 20ltr	A semi-gloss, water-based, lead-free enamel. Ideal for use directly onto new steel, primed wood surfaces. Low VOC and environmentally friendly.	White - Can be tinted	6hrs drying time between coats	8 sqm per litre (1 coat)	Brush, roller or airless-spray
DWBENAMEL5	Dynamiq Waterbased Enamel Paint 5ltr					
DTENNIS20	Dynamiq Tennis Court Paint 20ltr	A high quality textured tennis-court surfacing paint. Also ideal as a paving paint for driveways and walk ways. Anti-slip.	Tinted to order	6hrs drying time between coats	2 sqm per litre (1 coat)	Brush, roller, squeegee or trowel

RUST TREATMENTS

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DRUSTR20	Dynamiq Rust Remover 20ltr	A phosphoric acid infused liquid that softens and removes rust off metal surfaces. Easy to use and apply. Loosens rust in 20 minutes. Just wash off with water.	A clear liquid tinted red	Allow to react for 20-30 minutes before washing off	10 sqm per litre	Brush
DRUSTR5	Dynamiq Rust Remover 5ltr					
DZINCPRIMER20	Dynamiq Zinc Phosphate Primer 20ltr	A solvent-based, zinc-infused metal primer that prevents rust creep. Ideal for use on structural steel and for priming previously rusted metal. Often used as a primer on IBR and corrugated sheets.	Olive Green	Allow 8hrs curing time before overcoating	10 sqm per litre	Brush or roller
DZINCPRIMER5	Dynamiq Zinc Phosphate Primer 5ltr					




WATERPROOFING						
CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DFS20	Dynamiq Fibreskin Waterproofing 20ltr	Fibreskin is a new generation fibre-filled, long-life, water-based, elastic waterproof coating. With its exceptional strength, Fibreskin is ideal for parapets, window sills, primed plastered surfaces, concrete and steel roofs	White, Black, Grey, Red Oxide	2-3 hours drying time between coats	2sqm per 1 litre per coat	Long pile roller or brush
DFS5	Dynamiq Fibreskin Waterproofing 5ltr					
DDAMPSB20	Dynamiq Damp Seal (SuperSeal) 20ltr	A high-fill solvent-based priming and water-proofing coating used on friable plastered surfaces previously damaged by water and damp. Creates a high strength primer coat.	White	6hrs drying time Allow to cure 12hrs before overcoating	4-6 sqm per litre depending on surface porosity	Brush or roller
DDAMPSB5	Dynamiq Damp Seal (SuperSeal) 5ltr					



CONCRETE

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DCONCRETE20	Dynamiq Concrete Enamel 20ltr (Grey, Black, Red Oxide)	For use on concrete floors. Steel floated floors must be acid-washed before application. A hardener can be added for extra strength.	Grey, Red Oxide, Black, Green (Can be tinted)	12 hours (6 hours with hardener)	10 sqm per litre per coat	Mohair roller or brush
DCONCRETE5	Dynamiq Concrete Enamel 5ltr (Grey, Black, Red Oxide)					
DCONCRETE20G	Dynamiq Concrete Enamel 20ltr (Green)					
DCONCRETE5G	Dynamiq Concrete Enamel 5ltr (Green)					
DPOLYTHANE20PB	Dynamiq Single Com Polyurethane 20ltr Pastel Base	A single component Polyurethane coating for use on industrial, commercial and residential concrete floors. Dries to a hard-wearing surface. Steel floated floors must be acid-washed before application. Not recommended for exterior applications.	Tinted to order	8hrs drying time between coats (12 hrs in winter time)	8 - 10 sqm per litre per coat. A minimum of two coats is recommended	Mohair roller or brush
DPOLYTHANE5PB	Dynamiq Single Com Polyurethane 5ltr Pastel Base					
DPOLYTHANE20PB	Dynamiq Single Com Polyurethane 20ltr Deep Base					
DPOLYTHANE5PB	Dynamiq Single Com Polyurethane 5ltr Deep Base					

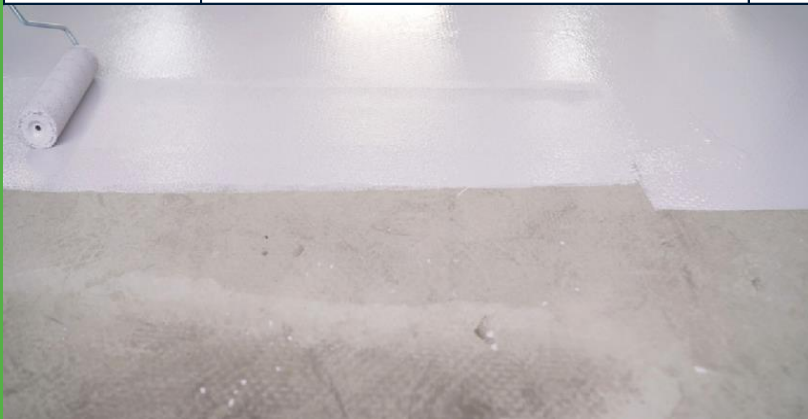

CONCRETE (Continued...)

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DSTONES20	Dynamiq Stone Sealer 20ltr	A novel and innovative solvent-soluble, polymer-based pure acrylic penetrating sealer with a satin finish. For exterior and interior use on uncoated sandstone, slasto tiles, cement screeds, concrete and masonry floor surfaces to protect substrates from rain/sun and medium duty wear and tear.	Clear	3-4 hours hard dry	10 sqm per litre per coat	Roller, brush or airless spray
DSTONES5	Dynamiq Stone Sealer 5ltr					
DRUBBER20	Dynamiq Rubbertex 20ltr	A hard-wearing and tough rubber coating for use in the back of bakkies and trucks. Also ideal for bullbars, bumpers and wheel wells.	Black	3-4 Hours	1-2 sqm per litre per coat	Brush, roller or spray
DRUBBER5	Dynamiq Rubbertex 5ltr					



ROADMARKINGS

CODE	SHORT DESCRIPTION	LONG DESCRIPTION	COLOURS	DRYING TIME	SPREAD RATE	APPLICATION
DROADM20WB	Dynamiq Road Marking SABS 20ltr White/Black	A solvent-based quick-drying road-line paint for marking parking lots, roads and factories. Formulated to SABS specifications.	White, Black, Green, Yellow, Red	15 minutes	4-6 sqm per litre per coat depending on surface type and porosity	Mohair roller or brush
DROADM5WB	Dynamiq Road Marking SABS 5ltr White Black					
DROADM20Y	Dynamiq Road Marking SABS 20ltr Yellow					
DROADM5Y	Dynamiq Road Marking SABS 5ltr Yellow					
DROADM20R	Dynamiq Road Marking SABS 20ltr Red					
DROADM5R	Dynamiq Road Marking SABS 5ltr Red					
DROADM20G	Dynamiq Road Marking SABS 20ltr Green					
DROADM5G	Dynamiq Road Marking SABS 5ltr Green					





www.dynamiq.co.za